


Wasserdichte Kabelverschraubung aus PA66GF UL90 VO 960°C
Waterproofed screwed cable gland, material PA66GF UL90 VO 960°C

	Wasserdichte Schraubverbindung 238-470-51 238-471-51	Kategorie: NON-LED
		2018-08-16
		R002



Wasserdichte Schraubverbindung aus PA66GF UL90 VO GWT 960°C
waterproofed screwed cable gland, material PA66GF UL90 VO GWT 960°C

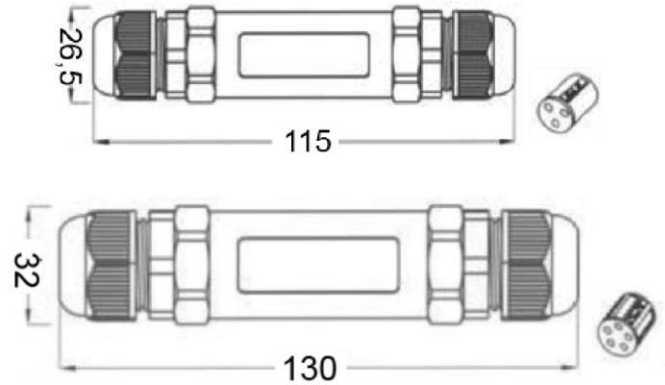

Technische Daten / specifications:

Beschreibung description	238-470-51	238-471-51
Gehäusematerial case material	PA66GF UL90 VO GWT 960°C	
Gehäusefarbe case colour	schwarz black	
Abmessungen dimensions	115x26,5mm	130x32mm
passende Kabel suitable cable	H05VV-F	H05VV-F
Pole pole	3	5
min Querschnitt / Durchmesser min cross-section / diameter	3G1,5mm ² / Ø7mm	5G1,5mm ² / Ø8mm
max Querschnitt / Durchmesser max cross-section / diameter	3G4mm ² / Ø13mm	5G4mm ² / Ø17mm
max Strom max current	32A	32A
max Spannung max voltage	450Vac	450Vac
max Druck max pressure	5 Bar	5 Bar
Temperatur temperature	-40°C - 85°C	-40°C - 85°C