


DALI-Steuerung, 4 Kanäle, für Hutschiene
DALI control, 4 channels, for top hat rail mounting



DALI 4-Kanal Dimmer, 4 Adressen, Dimmbereich 0-100%, 256 Stufen, DALI Adressen manuell per Digitalanzeige, automatisch adressierbar vom Mastercontroller
 DALI 4-channel dimmer, 4 addresses, dimming area 0-100%, 256 steps, DALI addresses manually adjustable via digital display, automatic addressable from Master controller

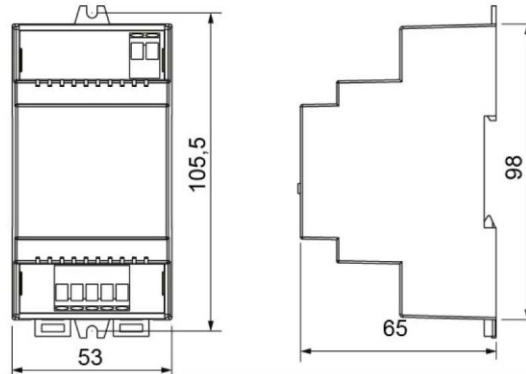

Technische Daten / specifications: (K6-) 552-408-00

Eingangsspannung input voltage	12Vdc - 36Vdc	
Ausgangsspannung output voltage	12Vdc - 36Vdc / Kanal 12Vdc - 36Vdc / channel	
Ausgangsstrom output current	max. 5A / Kanal max. 5A / channel	
Ausgangsleistung output wattage	max. 60W (12Vdc) - 180W (36Vdc) / Kanal max. 60W (12Vdc) - 180W (36Vdc) / channel	
Kanäle channels	4	
Signaltyp signal mode	DALI (IEC 62386 / IEC 60929)	
Umgebungstemperatur (ta) ambient temperature (ta)	-20°C - +50°C	
Gehäusetemperatur (tc) case temperature (tc)	max. 75°C	
Material material	Kunststoff plastic	
Schutzklasse safety class	III	
Schutzart protection class	IP 20	
Abmessungen (BxTxH) / Gewicht dimensions (WxDxH) / weight	53*x65x108mm / ca. 110g	*= 3 Teilungseinheiten TE *= 3 horizontal pitches HP
Leitungsquerschnitt Steckklemme conductor cross section plug terminal	0,5 – 1,5mm ² AWG 16-20	